



COMBINED HEAT AND POWER (CHP OR CO-GENERATION)

with GENSYS 2.0

FRANCE

CHP plants require high flexibility and a high level of performance from the controllers.

Constraints in terms of temperature control and electrical power required to operate differently from conventional power plants with more features and more adapted solutions.

Our solution

The plant is composed of two 1500kVA gas generators running on parallel with mains. Both generators are driven by **GENSYS 2.0** using «external start sequence» option and remote inputs/outputs extensions to be adapted to the existing engine controllers.

Products installed

- 2 **GENSYS 2.0** with mains paralleling option,
- Digital & analog CANopen input/output extensions,
- CPA mains power transducer,
- Remote tactical screen,
- PM-A (Power Metering)
- Modbus interface.


GENSYS2.0 units manage:

- Synchronization via contact outputs,
- Requested active power and actual power set point sent to the engine controller module,


- The temperature set points and associated auxiliaries.
- Information from the grid power.
- Power factor.
- Electrical protections and paralleling protection

CRE TECHNOLOGY has been able to meet the technical specifications required in terms of gas engine control thanks to its highly integrated solutions and their ability to include specific sequences.

APPLICATION

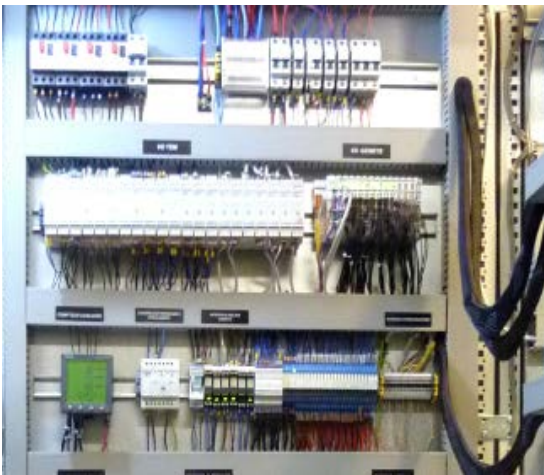

DETAILS OF APPLICATION

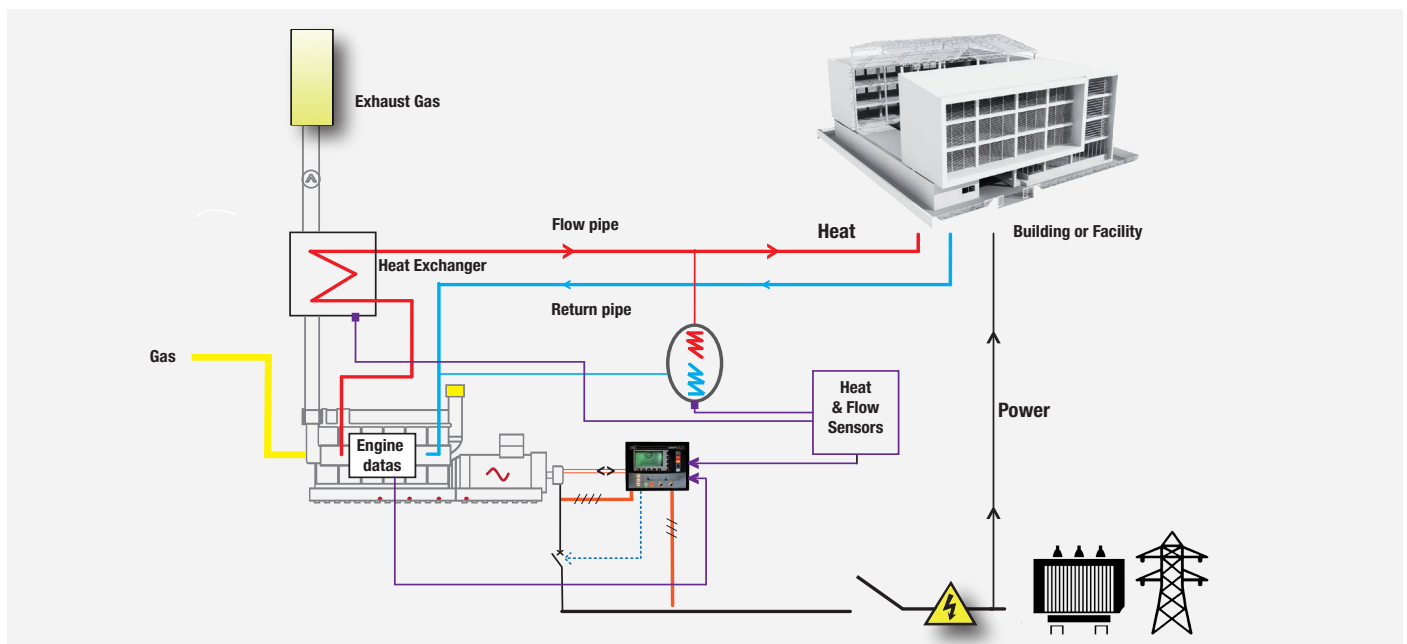



EXPERT IN GENERATOR SOLUTION

CRE TECHNOLOGY

130 allée Charles-Victor Naudin - Les templiers - Sophia Antipolis

06410 BIOT / FRANCE

Tél: +33 (0) 492 38 86 82

Fax: +33 (0) 492 38 86 83

info@cretechnology.com

COMBINED HEAT & POWER APPLICATION_EN_A2018

