



Thanks to its flexibility and strength, the **GENSYS 2.0** is perfectly suitable for a container or a rental application. The **GENSYS 2.0** has a I/O high capacity expansion, with the ability to manage input / output relay as a dial indicator or door contacts. The product's potential in terms of integrated programming can meet 100% of generator applications. It will control, either on 60Hz parallel to mains or on 50Hz in AMF. The user switches the operational mode by a simple switching key.

The **GENSYS 2.0** allows a 3 phases, biphases or a single phase configuration.

The screen in large size characters, the synoptic front panel interface and the comprehensive manual give the users a maximum safety and simplicity.


The IP65 front panel, the communication isolated ports, the tropicalization and the backlight temperature compensated option are an asset for extreme environment applications.

The **GENSYS 2.0** also offers an optional «PowerTank» connection with a Capacitor to avoid starting failures.

APPLICATION



DETAILS OF APPLICATION

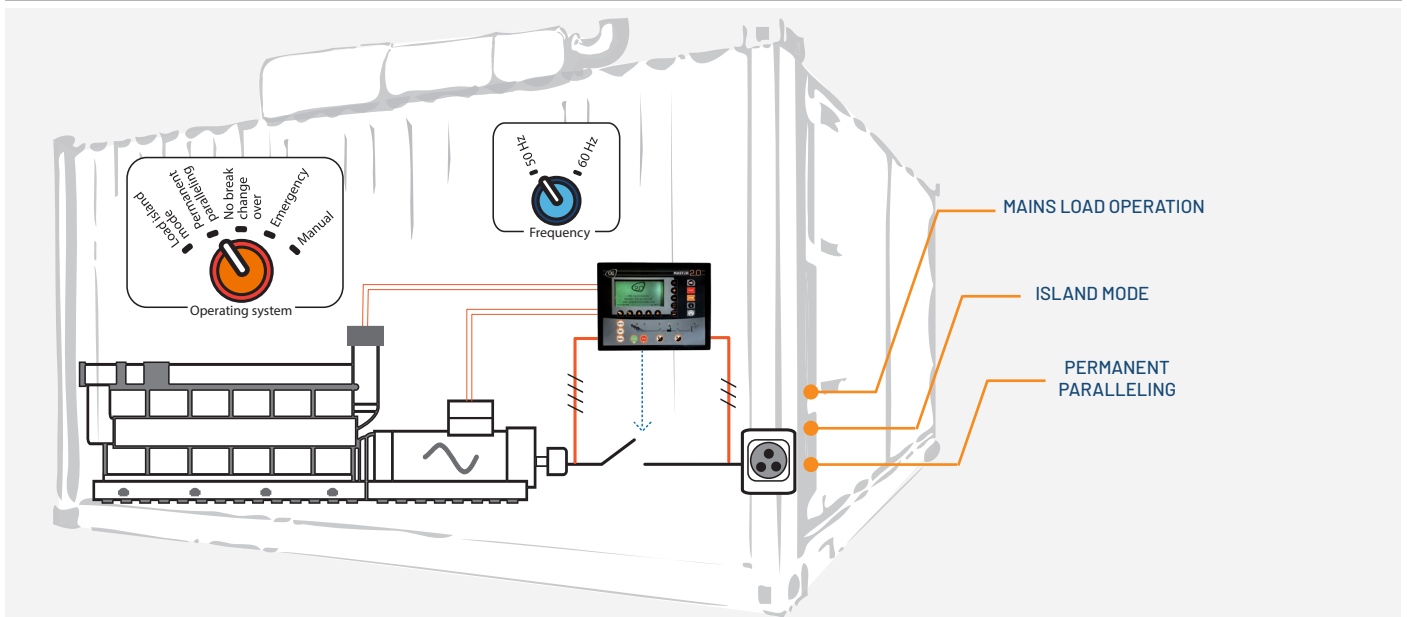



EXPERT IN GENERATOR SOLUTION

CRE TECHNOLOGY

130 allée Charles-Victor Naudin - Les templiers - Sophia Antipolis

06410 BIOT / FRANCE

Tél: +33 (0) 492 38 86 82

Fax: +33 (0) 492 38 86 83

info@cretechnology.com

RENTAL APPLICATION FRANCE & USA_EN_A2018

